


The PVC and urethane foam used in developing insulated PVC has been ASTM approved (ASTM numbers are available upon request). Schedules of PVC used, R-Values, and inside and outside diameters are demonstrated in the grid to the right.

We at INSUL-SEAL INSULATED PVC INCORPORATED, are prepared to work with you, "our valued customer", to fit our product-line to your unique application. We are proud of our products, our company and our employees. For further information and possible "CUSTOM" applications, contact us at...

**Insulated PVC comes readily available in:**

	<b>Inside Diameter</b>	<b>Schedule of PVC Pipe</b>	<b>R-Value of Foam</b>	<b>Outside Diameter</b>
■	6 inches	40	13	10 inches
■	6 inches	SDR 35 3034	14	10 inches
■	4 inches	40	13	8 inches
■	4 inches	SDR 35 3034	15	8 inches
□	2 inches	40	13	6 inches

All pipe sizes are manufactured in ten foot lengths with a 6 mil polyethylene protective sleeve, belled ends, and solvent joints. Fittings available in corresponding diameters.

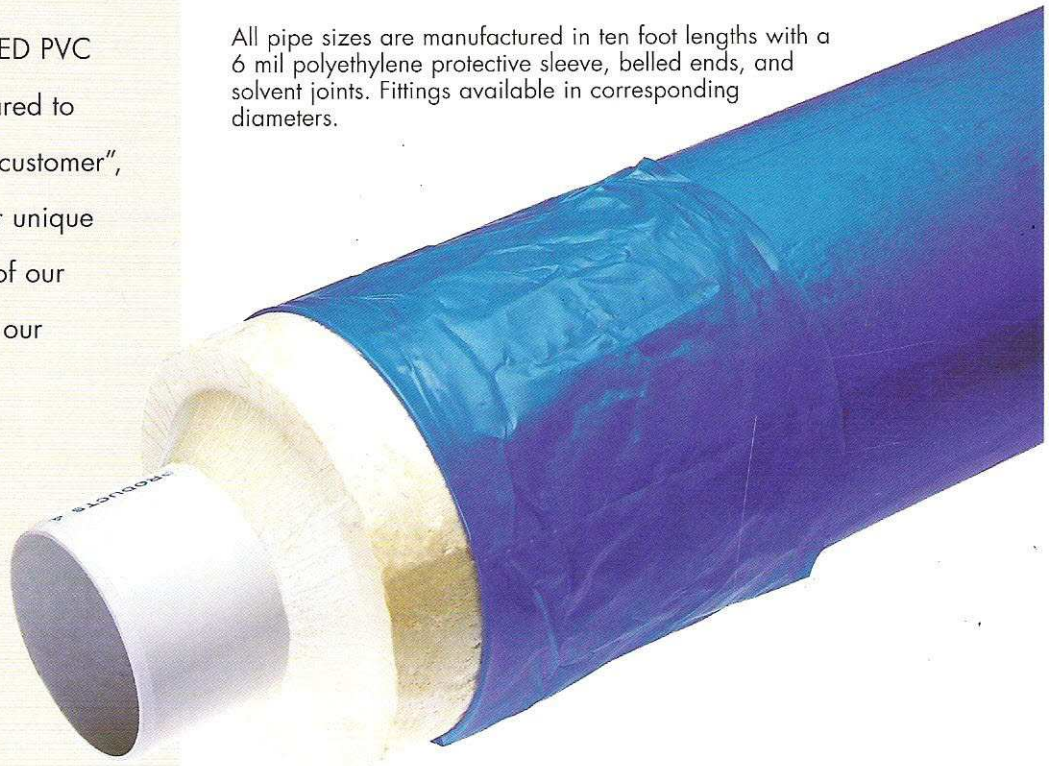

**Insul-Seal**

INSULATED PVC

217 Harrison Street North  
 Box 68  
 Racine, Minnesota 55967  
 (507) 378-4131  
 FAX (507) 378-7151

U.S. Patent Number 5183299  
 Canadian Patent Number 2088421

Distributed by:



(920) 388-0672  
 vgseptic@hotmail.com